International application No.

PCT/DK 98/00276

A. CLASSIFICATION OF SUBJECT MATTER						
IPC6: A61B 17/39 According to International Patent Classification (IPC) or to both national classification and IPC						
B. FIELDS SEARCHED						
Minimum documentation searched (classification system followed by	y classification symbols)					
IPC6: A61B						
Documentation searched other than minimum documentation to the	extent that such documents are included in	n the fields searched				
SE,DK,FI,NO classes as above						
Electronic data base consulted during the international search (name	e of data base and, where practicable, search	n terms used)				
C. DOCUMENTS CONSIDERED TO BE RELEVANT	·					
Category* Citation of document, with indication, where ap	propriate, of the relevant passages	Relevant to claim No.				
A US 5403312 A (DAVID C. YATES ET (04.04.95), column 5, line 4 line 38	AL), 4 April 1995 46 - line 49; column 6,	1				
· ·						
29 August 1995 (29.08.95),	US 5445638 A (MARK A. RYDELL ET AL), 29 August 1995 (29.08.95), column 4, line 55 - column 5, line 2, figure 3					
		·				
Further documents are listed in the continuation of Bo	x C. X See patent family anne.	X				
Special categories of cited documents:      Taler document published after the international filing date or priority date and any in any flight with the any light from the priority date.						
"A" document defining the general state of the art which is not considered to be of particular relevance date and not in conflict with the application but cited to understand the principle or theory underlying the invention						
"E" erlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is						
cited to establish the publication date of another citation or other special reason (as specified)  "V" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is						
means  Combined with one or more other such documents, such combination being obvious to a person skilled in the art						
Date of the actual completion of the international search	"&" document member of the same patent  Date of mailing of the international					
•	2 5 -02- 1999					
18 February 1999	2 3	UL 1033				
Name and mailing address of the ISA/  Authorized officer						
Swedish Patent Office  Box 5055, S-102 42 STOCKHOLM Anette Hall						
Facsimile No. + 46 8 666 02 86	Telephone No. + 46 8 782 25 00	·				

International application No.

PCT/DK98/00276

Box I	Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)
This inte	rnational search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:
1. <b>x</b>	Claims Nos.: 25-35 because they relate to subject matter not required to be searched by this Authority, namely:
	A method of treatment of the human or animal body by surgery (Article 17(2)(a)(i) and Rule 39.1(iv)).
2.	Claims Nos.: because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
,	
3.	Claims Nos.: because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).
Box II	Observations where unity of invention is lacking (Continuation of item 2 of first sheet)
This Inte	ernational Searching Authority found multiple inventions in this international application, as follows:
1.	As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2.	As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3.	As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4.	No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
Domari	The additional county fore years accommodal by the analysis protect
Keinark	on Protest  The additional search fees were accompanied by the applicant's protest.  No protest accompanied the payment of additional search fees.

Information on patent family members

02/02/99

International application No.

PCT/DK 98/0027	b
----------------	---

	itent document in search repor	t	Publication date		Patent family member(s)	l'ublication date
US	5403312	A	04/04/95	AU	687405 B	26/02/98
				AU	6862294 A	02/02/95
				CA	2128450 A,C	23/01/95
			•	EP	0640317 A	01/03/95
				GR	94100336 A	22/05/96
				JP	7171163 A	11/07/95
				US	5558671 A	24/09/96
				US	5688270 A	18/11/97
				US	5693051 A	02/12/97
				US	5709680 A	20/01/98
				US	5807393 A	15/09/98
		•		US	5810811 A	22/09/98
				US	5817093 A	06/10/98
	•			US	5833690 A	10/11/98
US	5445638	 А	29/08/95	NON	E	

	•				*	
					.1.	1
<b>?</b> *						
					•	
		8.	₹		e de la companya de l	
<b>1</b> )						
44						
K.				•		
			,			
						1
						,
Ki.						,
			•			
Ϋ́ (2)						
NE.						
						e Land
						in enter His
+					All Control of the Co	
P <sup>oo</sup> n.						, <b>i</b> ,*
*					4.7	*
				*. •		
					William Control of the Control of th	
1	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1					
*:						
4						•
				1		
r)						•
3						
\$ . 5 ,						*
		and the second second				
en en en						
in N						
X .						
₹ <b>*</b>	two transfer of the second					
7						
¥						
<i>t</i>					n de general de la companya de la c La companya de la co	-
1. The state of th		**************************************	\$43.00			
4						
1			1 30 K 11 82			

## WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



#### INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> :		(11) International Publication Number:	WO 00/15116
A61B 17/00	A1	(43) International Publication Date:	23 March 2000 (23.03.00)

(21) International Application Number:

PCT/US99/19736

(22) International Filing Date:

30 August 1999 (30.08.99)

(30) Priority Data:

09/150,909

10 September 1998 (10.09.98) US

(71) Applicant: GENERAL SURGICAL INNOVATIONS, INC. [US/US]; 10460 Bubb Road, Cupertino, CA 95014 (US).

(72) Inventors: RYDIN, Jeffrey; 652 Lincoln Avenue, Winnetka, IL 60093 (US). PALERMO, Thomas, J.; 4261 Leigh Avenue, San Jose, CA 95125 (US). PEARTREE, Kenneth, A.; 840 Meridian Way #75, San Jose, CA 95126 (US).

(74) Agent: ENGLISH, William, A.; Lyon & Lyon LLP, Suite 4700, 633 West Fifth Street, Los Angeles, CA 90071-2066 (US).

(81) Designated States: CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).


Published

With international search report.

(54) Title: DIRECT VISION SUBCUTANEOUS TISSUE RETRACTOR

#### (57) Abstract

A vascular harvest retractor device (10) includes an elongate member (12) having an arcuate cross section defining an elongate passage therein, and a handle (30) integrally molded to its proximal end (14). A transparent illumination member (50) has a proximal portion (52) connectable to a light source, and a distal portion within the elongate passage. The distal portion of the illumination member extends along an inner surface of the elongate member which includes a plurality of grooves for diffusing light transmitted from the proximal portion into the distal portion uniformly into, and along the elongate passage. The illumination member may be attached to the elongate member, and/or handle. The handle may include a cavity through which the illumination member extends, and to which a handle cover may be attached. The device may also include a support member attachable to the proximal end of the elongate member to further facilitate visualization of, and/or access into the elongate passage.

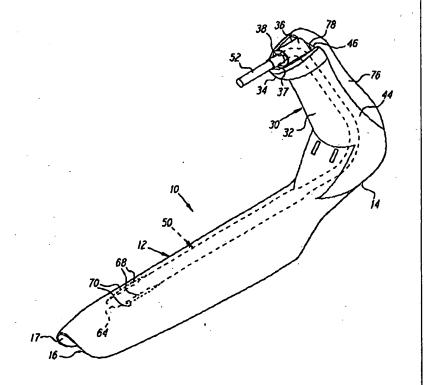

## FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
ΑU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
ΑZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB .	Barbados	GH	Ghana	MG	Madagascar	ТJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	ΙL	Israel	MR	Mauritania *	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA-	Canada	IT	Italy	MX	Mexico	υz	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	- KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		•
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		•
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		4
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

PCT/US99/19736 WO 00/15116

#### DESCRIPTION

## <u>Direct Vision Subcutaneous Tissue Retractor</u>

application is continuation-in-part This a application Serial No. 08/925,967, filed September 9, 1997, which is a continuation-in-part of application Serial No. 08/867,133, filed June 2, 1997, the disclosures of which are expressly incorporated herein by reference.

#### Field Of The Invention

The present invention relates generally to surgical retractors, and more particularly to vascular retractors 10 that are self-supporting and/or provide an illuminated longitudinal working window for vascular harvesting procedures.

#### Background Of The Invention

15

Numerous surgical procedures, such as coronary bypass surgery, reverse or in-situ femoral-popliteal or femoraltibial bypass procedures and the like, may involve accessing and/or harvesting the saphenous vein or other blood vessel of a patient. For example, in coronary bypass surgery, a 20 vein may be harvested from elsewhere in the patient's body and grafted into place between the aorta and a coronary It is generally preferred to use a vein taken from the patient undergoing the surgery, as the patient is a ready source of suitable veins that will not be rejected by 25 the body after grafting. In particular, the saphenous vein in the leg is often used for this procedure, for example, because the saphenous vein is typically 3-5 mm in diameter to the coronary and comparable in size Furthermore, the venous system of the leg is sufficiently 30 redundant that the saphenous vein may be removed and the remaining veins in the leg will continue to provide adequate

2

return blood flow. Alternatively, the cephalic vein in the arm may sometimes be used.

Traditionally, to harvest the saphenous vein, an open surgical procedure has been used to expose and remove the vein from the leg. Because of wound morbidity and patient pain often encountered in such procedures, however, minimally invasive access has become increasingly preferred.

example, instead of an open procedure, an interrupted incision method may be used in which a series of incisions with skin bridges between them are made between the groin, the knee and/or the ankle. Through the incisions, the surgeon dissects the vein from the surrounding tissues, lifts the vein from the tissues, and divides and ligates the various tributary veins that feed into the saphenous vein. Once the vein is completely mobilized, the surgeon cuts the ends of the vein and removes it from the leg. The incisions in the leg are closed, and the vein is prepared for implantation.

10

15

20

25

30

35

During an interrupted incision procedure, a retractor may be used to assist in visualization of the vein. The retractor typically includes a wide, flat shaft with a handle on its proximal end made from stainless steel. The retractor may be inserted into an incision and directed along a previously dissected path over a section of vein to be harvested. The handle of the retractor may then be lifted away from the surface of the leg, thereby maintaining the space created by dissection under the shaft adjacent the vein in an open condition. Such retractors may include a source of light connected to the proximal end, and light from the light source may be projected into the space to facilitate visualization of the vein.

In an alternative method, vein harvesting may be accomplished using an endoscopic procedure. One or more small incisions may be made at selected locations for providing access to the vein being harvested. For example, to harvest the saphenous vein, an incision may be made at

15

20

25

30

35

the groin, at the knee, and/or at the ankle. A tunneling instrument, such as a blunt or soft-tipped dissector, may be utilized to dissect subcutaneous tissue along the anterior surface of the vein being harvested. Such instruments generally include an elongate member, which fabricated from transparent, opaque or other material, having a rounded distal end and a passage therein for the endoscope receiving endoscope, providing an visualization within or beyond the walls of the instrument.

The tunneling instrument is inserted into the incision and advanced or pushed along between tissue layers to dissect and expose the saphenous vein. The tip of the instrument is generally kept near or in contact with the vein as the instrument is advanced along, thereby creating a small tunnel adjacent the anterior surface of the vein. An inflatable balloon (alternatively provided in a collapsed condition on the tunneling instrument prior to insertion into the incision) may be introduced into the tunnel, and inflated to further dissect the tunnel to an appropriate size for surgery.

Once the desired length of vein is exposed and an appropriate tunnel developed, the balloon and/or tunneling instrument may be removed, and a retractor, typically a wide flat shaft with a handle on its proximal end, may be inserted into the incision and directed along the dissected path over the section of vein to be harvested. The handle of the retractor may then be lifted away from the surface of the leg, thereby maintaining the working space created by dissection under the shaft adjacent the vein in an open Surgical instruments may then be inserted into condition. the working space to dissect the tissues surrounding the vein, ligate tributary veins, and mobilize the vein. endoscope may be provided in a passage in the retractor or working space inserted directly into the to visualization during the harvesting procedure.

4

Retractor devices in vein harvesting procedures often have limitations. For example, such retractors typically require external support to hold the retractor away from the surface of the vein and maintain the working space. The surgeon or physician's assistant may have to hold a handle on the retractor, preventing both hands from being free for procedure or may even require an assistant. Alternatively, mechanical support an external may be provided to hold the retractor, but such a support may interfere with access to the operative site.

Some retractors include a distal hood capable of maintaining a working space thereunder. These hoods, however, only create a limited self-supported working space, requiring that the retractor be moved when it is desired to work in a new location. Such retractors also generally require external support to provide access along the retractor shaft between the incision and the hooded space.

Accordingly, there is a need for a device for retracting subcutaneous tissues and/or for holding open a working space during surgical procedures that provides improved illumination and/or visualization within the space.

#### Summary Of The Invention

10

15

20

25

30

35

present invention is directed to retractors that are self-supporting and/or provide an illuminated working space for vein harvesting or similar procedures. In one aspect of the present invention, a device for retraction of subcutaneous tissue is provided that includes an elongate member having proximal and distal ends, and having an arcuate cross-section defining elongate passage therein. The device also includes a substantially transparent illumination member or lightpipe having a proximal portion connectable to a source of light, and a distal portion within the elongate passage for directing light from the proximal portion into the elongate passage.

15

20

25

30

35

The elongate member is preferably formed from injection molded plastic, and, if desired, may be formed from a facilitating for material transparent substantially visualization beyond the walls of the elongate member. preferred form, the device also includes a handle extending from and preferably integrally molded to the proximal end of More preferably, the handle extends the elongate member. substantially perpendicularly to a longitudinal axis of the elongate member away from the elongate passage which may facilitate visualization of and/or access to the elongate passage.

The illumination member preferably extends along an inner surface of the elongate member and may include an illumination window directed towards the elongate passage. The distal portion of the illumination member and the inner surface of the elongate member may include cooperating tabs and slots for securing the distal portion of the illumination member to the inner surface. The proximal and distal portions of the illumination member are preferably integrally molded together from injection molded plastic to facilitate the passage of light from a light source at the proximal portion to the distal portion.

The illumination member preferably includes a plurality of lateral grooves in the distal portion, e.g., in an upper diffusing portion, for distal surface of the transmitted from the proximal portion into the distal portion, e.g. through a lower surface of the distal portion towards a longitudinal working window defined by More preferably, the lateral grooves elongate member. extend progressively deeper into the distal portion in the direction towards a distal tip of the illumination member for diffusing light substantially uniformly along the elongate passage and/or the longitudinal working window. Thus, an external source of light may be used to illuminate the longitudinal working window along the elongate passage to facilitate visualization of a blood vessel, such as the saphenous vein, or other subcutaneous tissue structure, during vein harvest or other procedures.

The device may also include a support member extending proximal end of the elongate member facilitating access to and/or visualization of the elongate The support member is preferably attachable to a handle or handle cover (described below) on the proximal end of the elongate member. In addition, the support member is preferably adjustable and extends substantially 10 perpendicularly to a longitudinal axis of the elongate member towards the elongate passage when attached to the handle or handle cover of the elongate member. For example, in a preferred form, the support member and the proximal end of the elongate member and/or the handle may include a set of cooperating tabs and slots for detachably securing the 15 support member to the elongate member in one of a plurality of available positions, thereby providing adjustability. For example, the support member may be attached to the elongate member at one of a plurality of incremental 20 positions to raise the proximal end of the elongate member to a predetermined height and/or to further tent entrance of an incision to facilitate visualization and/or access to the working space held open by the device through the incision.

In a preferred form, the support member includes a pair of arms defining an open space therebetween to straddle the access path to the elongate passage through the support member. The arms may be attached at their lower ends to a base, preferably having a slightly curved shape contoured to fit the surface of a patient's anatomy. The support member may facilitate use of the retraction device in a hands-free capacity, i.e., the support member may be sufficiently stable to support the elongate member on its own, thereby allowing a surgeon to use both hands during a vein harvesting or similar procedure.

7

In another aspect of the present invention, a device for retraction of subcutaneous tissue is provided that includes a retractor member having an elongate portion including proximal and distal ends, a handle extending from end of the retractor portion, the proximal substantially transparent illumination member having proximal portion connectable to a source of light, intermediate portion extending through the handle, and a distal portion extending along a lower surface of the The distal portion of the illumination 10 elongate portion. member preferably includes a surface for directing light transmitted through the illumination member from a source of light connected to the proximal portion towards a working space held open by the device.

The handle includes a sleeve through which the proximal portion of the illumination member extends, which may include an adapter for attaching a source of light to the sleeve. The handle preferably includes a cavity through which the intermediate portion of the illumination member extends, and a handle cover attachable over the cavity.

15

20

25

30

35

To assemble the device, the proximal portion of the illumination member may be directed through the sleeve, while the distal portion of the illumination member is advanced along the lower surface of the elongate portion, until the intermediate portion enters the cavity in the handle. Preferably, the distal portion of the illumination member and the elongate portion include cooperating tabs and slots for substantially securing the distal portion to the lower surface of the elongate portion. The intermediate portion of the illumination member may substantially engage guide rails within the cavity to further secure the illumination member.

A handle cover may be placed over the cavity, and substantially secured to the handle, to thereby substantially enclose the cavity and/or to further secure the intermediate portion. The assembled device may then be

. 8

packaged and provided to a surgeon or A support member, such as that described preassembled. above, may also be provided with the device for supporting the elongate portion of the device, as previously described-

The device may then be used in a method for retracting tissue to maintain a working space during a surgical procedure involving a subcutaneous tissue structure of a patient. An incision may be created at a location adjacent one end of the tissue structure, and a layer of tissue may be dissected above a section of the tissue structure through the incision. The retractor may be inserted into the incision, and advanced along the section of the tissue structure while being oriented. The retractor may hold open a longitudinal working space above the tissue structure and 15 the within arcuate cross-section of the Preferably, the retractor is self-supporting and maintains the working space without external support. A source of light may be connected to the proximal portion of the illumination member, thereby transmitting light through the illumination member into the working space, and a surgical procedure may then be performed within the working space.

10

20

25

30

35

If desired, a second incision may be created adjacent to another length of the tissue structure, and the retractor used to hold open another working space, for example, to allow longer sections of the saphenous vein to be harvested for use in coronary bypass graft surgery. In addition, the support member may be attached to the proximal end of the device after being inserted into the incision, the support member holding the proximal end of the retractor at a predetermined height above the tissue structure facilitate access into the working space through the incision.

Thus, the device may be used during a vein harvesting procedure to harvest a section of the saphenous vein through one or more incisions, each of which are preferably not more than about 4 cm long. The procedure may substantially

25

30

reduce the wound morbidity and/or patient pain often associated with open harvesting procedures, while not requiring use of an endoscope and the more demanding surgical methods required for endoscopic surgery.

Additional objects and features of the present invention will become apparent from consideration of the following description taken in conjunction with the accompanying drawings.

### Brief Description Of The Drawings

10 FIG. 1 is a side view of a first preferred embodiment of a retractor device in accordance with the present invention.

FIG. 2 is a perspective view of the retractor device of FIG. 1, including a lightpipe shown in phantom.

15 FIGS. 3A and 3B are back views of the retractor device of FIG. 1, with the handle cover removed and attached, respectively.

FIG. 4 is an exploded perspective view of the retractor device of FIG. 1

FIG. 5 is a perspective detail of a lightpipe for use with the retractor device of FIG. 1.

FIG. 6 is a perspective view of an alternative embodiment of the retractor device of FIG. 1, including an adjustable auxiliary support member attached to a handle of the retractor device.

## Detailed Description Of The Preferred Embodiments

Turning now to the drawings, FIGS. 1-6 show a preferred embodiment of a retractor device 10 in accordance with one aspect of the present invention. The retractor device 10 includes an elongate member 12, a handle 30, a lightpipe 50, and a handle cover 72.

The elongate member 12 has a proximal end 14, a distal end 16, and an arcuate or "C" cross-section, as best seen in FIGS. 3A and 3B. The arcuate cross-section may define a

10

portion of the periphery of a circle, an ellipse or similar shape. The distal end 16 is preferably rounded or streamlined to minimize tissue trauma when the retractor device 10 is directed along a dissected space in a patient (not shown), and may include a distal opening 17 to allow access beyond the distal end 16. The elongate member 12 defines an elongate passage 18 therein extending along a longitudinal axis 24 between the proximal and distal ends 14, 16. The elongate member 12 also defines a longitudinal working window 20 along the elongate passage 18 between longitudinal edges 22 of the elongate member 12.

10

15

20

25

30

The elongate member 12 may be fabricated from any suitable metal or plastic material, but preferably is formed from injection molded polymer, such as polycarbonate, or other engineering plastics. Alternatively, the elongate member may be formed in a manner which facilitates cleaning and/or of a semi-rigid material, such as polyetherimide, which may be suitable for sterilization and reuse. The material may also be substantially transparent to facilitate visualization beyond or through the walls of the elongate member 12.

The elongate member 12 may also include circumferentially extended edges or curved tabs (not shown) integrally formed along a portion of the edges 22 of the elongate member 12 and extending peripherally from the edges 22, thereby defining an extended periphery (not shown). extended edges may increase the size of the working space held open by the retractor device 10 since the extended periphery further tents the working space, particularly at the location adjacent the extended edges. Additional discussion of such extended edges may be found in co-pending application Serial No. 08/867,133, filed June 2, 1997, the disclosure of which is expressly incorporated herein by reference.

The handle 30 is preferably integrally molded to and extends from the proximal end 14 of the elongate member 12,

although alternatively the handle 30 may be provided as a separate component (not shown) attachable to the elongate member 12. The handle 30 preferably extends substantially perpendicularly to the longitudinal axis 24 away from the elongate passage 18, thereby facilitating manipulation of the retractor device 10 during a surgical procedure. The handle 30 includes a front surface 32 and side surfaces 44, preferably having a generally curved shape for facilitating grasping of the handle 32, and includes an upper end 34.

A cylindrical sleeve 36 is integrally molded to the upper end 34, including an aperture 38 communicating with a cavity 40 within the handle 30 defined by the front and side surfaces 32, 44. A universal cable adapter 37 may be attached to the cylindrical sleeve 36, for example, by insert-molding. The universal cable adapter 37 may be formed from aluminum or similar material, and may include threads for securing a similarly threaded light cable or other source of light (not shown) to the cylindrical sleeve 36. Alternatively, the adapter 37 may include other connectors for cooperatively mating with a light source.

10

15

20

25

30

35

The cavity 40 extends substantially between the upper end 34 of the handle 30 and the proximal end 14 of the elongate member 12. A plurality of guide rails 42 are integrally molded to the handle 30 within the cavity 40 and extend at least partially between the aperture 38 in the cylindrical sleeve 36 and the elongate passage 18 within the elongate member 12. The handle 30 may also include a pair of recesses 46 in the upper end 34 and elongate tabs 48 along the side surfaces 44 for cooperating with tabs 78 on the handle cover 72 to substantially secure the handle cover 72 to the handle 30, as described further below.

With particular reference to FIGS. 4 and 5, the lightpipe 50 is a substantially transparent illumination member, preferably formed from injection molded plastic that allows efficient transmission of light therethrough, such as polystyrene. The lightpipe 50 includes a proximal portion

52, a curved intermediate portion 54 and a distal portion 56, preferably integrally molded as a single piece to prevent substantial loss of light passing therethrough. The proximal and intermediate portions 52, 54 preferably have—a substantially cylindrical shape to facilitate the transmission of light therethrough from a proximal end 58 of the lightpipe 50.

10

15

20

25

30

The distal portion 56 has generally а configuration defining an upper surface 60 and a lower surface 62, and terminates in a distal tip 64. Preferably, the upper surface 60 includes a plurality of lateral grooves 66 extending into the upper surface 60 for deflecting light passing along the distal portion 56 through the lower surface 62, as described further below. More preferably, the lateral grooves 66 extend substantially perpendicular to the longitudinal axis 24 and penetrate progressively deeper into the upper surface 60 of the distal portion 56 in the direction of the distal tip 64 to diffuse light essentially perpendicularly to and substantially uniformly along the longitudinal axis 24 within the elongate passage 18. bottom of the lateral grooves 66 may be ramped at a predetermined angle, e.g., oblique with respect to the longitudinal axis 24, to further deflect light substantially perpendicularly to the longitudinal axis 24 towards the longitudinal working window 20.

In alternative forms, the distal portion 56 of the lightpipe 50 may be substantially cylindrical (not shown) and the lateral grooves 66 may be provided on the upper half of the distal portion 56 and/or on the lower half of the distal portion 56 (not shown). In a further alternative, the lateral grooves 66 may be spaced progressively closer together in the direction of the distal tip 64 (not shown) to further facilitate substantially uniform diffusion of light from the distal portion 56.

The distal portion 56 also includes a pair of ramped tabs 68 proximate the distal tip 64 for cooperatively

15

20

25

30

engaging slots 70 formed on an inside surface 23 of the elongate member 12 for substantially securing the distal portion 56 of the lightpipe 50 to the elongate member 12. To attach the lightpipe 50 to the elongate member 12, the proximal portion 52 of the lightpipe 50 is directed through the aperture 38 in the handle 30 until the intermediate portion 54 substantially engages the guide rails 42 in the cavity 40. Simultaneously, the distal portion 56 is directed along the inside surface 23 of the elongate member 12 until the ramped tabs 68 substantially engage the slots 70.

With particular reference to FIGS. 3B and 4, the handle cover 72 may then be attached to the handle 30 to substantially enclose the cavity 40 and/or to further substantially secure the lightpipe 50 therein. The handle cover 72 includes a back surface 74 and side surfaces 76 having a configuration complementary to the configuration of the handle 30. The handle cover 72 includes tabs 78 adapted to be received in the recesses 46 in the upper end 34 of the handle 30 such that the handle cover 72 may be attached thereby to the handle 30. Preferably, when the handle cover 72 is received on the handle 30, the elongate tabs 48 on the handle 30 substantially engage the side walls 76 of the handle cover 72 to further secure the handle cover 72 onto the handle 30. The cooperating tabs 78 and recesses 46 and the elongate tabs 48 may substantially secure the handle cover 72 onto the handle 30 such that adhesives may be unnecessary.

For a reusable version of the retractor device 10, the elongate member 12, the lightpipe 50 and the handle cover 72 may be capable of disassembly for cleaning and/or sterilization. Alternatively, in a single use version, the elongate member 12, the lightpipe 50 and handle cover 72 may be substantially permanently attached together prior to packaging, thereby providing a ready-to-use device. For such a single use version, the handle cover 72 may be bonded

14

to the handle 30 using adhesives and the like, either alone or in conjunction with cooperating tabs and recesses.

During a procedure, a light cable or other source of light (not shown) may be coupled to the proximal portion 52 of the lightpipe 50, preferably to the universal cable adapter 37, such that light is directed into the proximal end 58 of the lightpipe 50. Light from the light cable then passes through the proximal and intermediate portions 52, 54 and enters the distal portion 56. As the light travels towards the distal tip 64 of the distal portion 56, the light encounters the lateral grooves 66, which deflect the light through the lower surface 62. The depth of the lateral grooves 66 into the upper surface 60 may be selectively altered to vary illumination along the distal portion 56 of the lightpipe 50. Thus, light may be diffused in any preferred manner through the lower surface 62 along the distal portion 56.

10

15

20

30

35

The handle 30 of the retractor device 10 may be grasped in one hand, and the elongate member 12 inserted into an incision leading to a dissected space, for example, a transverse or longitudinal incision about 4 cm long, to retract subcutaneous tissue to hold open a dissected anatomic space therein. Once the elongate member 12 is positioned within the space, for example, along a vein being harvested, the lightpipe 50 transmits light into the space, and particularly to the operating area within longitudinal working window 20 of the elongate member 12. distal portion 56 of the lightpipe 50 preferably the light substantially uniformly along longitudinal axis 24, thereby facilitating visualization of the vein and/or branches for easy ligation and removal.

In addition, as shown in FIG. 6, the retractor device 10 may include an auxiliary support member or stand 80 for elevating the proximal end 14 of the retractor device 10. The support member 80 includes a base 82 and a pair of legs 84 that are preferably integrally molded together. The base

15

20

25

82 preferably has a slightly curved shape contoured to fit the surface of a patient's anatomy, and the pair of legs 84 preferably extend from opposite sides of the base 82 towards one another to define a substantially triangular open space 86, facilitating access to the elongate passage 18.

Upper ends 88 of the legs 84 are disposed in close proximity to one another, and include tabs 90 adjacent one another that define a gap 91 therebetween. A hub 92 extends from an outer surface of each tab 90, i.e., opposite the gap Preferably, the legs 82 are semi-rigid, i.e., are sufficiently rigid to support the retractor device 10, but are sufficiently flexible that the tabs 90 may be compressed towards one another, but resiliently return to define the narrow gap 91.

The handle cover 72 includes a plurality of transverse slots 94 having a width similar to the uncompressed spacing of the tabs 90 such that the tabs 90 may be received in an individual transverse slot 94. The transverse slots 94 also include a pair of recesses 96 therein for receiving the hubs To attach the support member 80 to the retractor device 10, the tabs 90 are directed towards one another, i.e., reducing the width of the gap 91 between them, and then inserted into a selected transverse slot 94 in the handle cover 30, the compressed profile providing clearance for the hubs 92 to enter the transverse slot 94. The tabs 90 may then be released, the legs 84 resiliently returning the tabs 90 toward the uncompressed profile, apart from one another until the hubs 92 engage the recesses 96. Thus, proximal end 14 of the retractor device 10 may be adjusted 30 to a predetermined height above the surface of a patient's leg simply by moving the tabs 90 of the support member 80 to a corresponding transverse slot 94 in the handle cover 72.

With the support member 80 in place at a predetermined height, the proximal end 14 of the elongate member 12 may be 35 raised to facilitate the performance of a surgical procedure within the elongate passage 18. For example, the open space

20

30

35

86 may facilitate visualization within the elongate passage 18. In addition, the support member 80 may facilitate the direction of surgical instruments (not shown) through the open space 86 and into the elongate passage 18. The support member 80 may also provide hands-free retraction, enabling a surgeon to use both hands during the procedure. In addition to the support member 80, the elongate member 12 may include recessed portions 19 adjacent the proximal end 14 to provide an enlarged entrance into the elongate passage 18, for example, to further facilitate visualization and/or the direction of surgical instruments into the elongate passage 18.

Alternatively, other adjustment mechanisms may also be provided that may, for example, be attachable or permanently fixed to the proximal end 14. The adjustment mechanism may fix the proximal end 14 at one of a plurality of heights to tent the incision and/or to facilitate access to the working For example, a raised frame (not shown) may be attachable to the patient's anatomy, such as by a strap around their leg, to which the proximal end 14 may be attached. The frame should include an open therethrough to facilitate the introduction of surgical instruments into the elongate passage 18.

important feature of a retractor device accordance with the present invention is the arcuate crosssection which enables the device to retract and maintain subcutaneous tissue and hold open a working space during a surgical procedure. Conventional methods may be used to incise and dissect to create a subcutaneous space initially, for example, in preparation for vein harvesting from a patient's leg. Alternatively, U.S. Patent No. 5,601,581, issued to Fogarty et al., discloses an apparatus and method suitable for dissecting a subcutaneous space. disclosure of this reference and any others cited therein are expressly incorporated herein by reference.

To summarize such a useful procedure, a section of a tissue structure, for example a nerve or vein, especially the saphenous vein, may be selected to be harvested. incision may be created at a location adjacent to one end of the selected structure, such as at the groin or knee. instrument, such as a blunt or soft-tipped dissector, possibly including an inflatable balloon thereon, may be inserted into the incision and advanced along between tissue layers to identify the selected tissue structure. The tunneling instrument may be advanced along the anterior 10 surface of the tissue structure and/or a balloon on the tunneling instrument may be inflated to create a dissected space of a desired size. Once the desired dissected space is developed, the balloon may be deflated, and the tunneling 15 instrument may be removed from the dissected space through the incision.

A retractor in accordance with the present invention may then be inserted into the incision and directed along the dissected space while orienting the open side of the "C" shaped cross-section, e.g., the longitudinal working window 20, towards the tissue structure to hold open a working space above the tissue structure. The lightpipe 50 provides illumination within the working space and, in particular, facilitates visualization of a surgical site along the tissue structure within the working window 20. The arcuate shape of the retractor device 10 allows the subcutaneous tissues anterior to the surgical site, such as the tissues anterior to the saphenous vein, to be held up and away from the surgical site without needing external support. longitudinal edges 22 of the retractor device 10 abut the subcutaneous tissues adjacent the anterior surface of the tissue structure, and the longitudinal working window 20 facilitates access along a desired length of the tissue structure, for example, of a vein being harvested. instruments may be introduced into the incision and directed along the working space to any point along the length of the

20

25

30.

35

18

longitudinal working window 20 without having to relocate the retractor device during a surgical procedure, such as a vein harvesting procedure.

If desired, a second incision may be created and the procedure repeated at another location on the patient's leg adjacent to the first incision, the retractor device holding open a second working space to facilitate additional tissue structure to be ligated and/or harvested. Thus, a retractor device 10 in accordance with the present invention may allow a relatively long section of a vein, nerve or other tissue structure to be harvested through a series of relatively small incisions spaced apart from one another.

10

15

20

While the invention is susceptible to various modifications, and alternative forms, specific examples thereof have been shown in the drawings and are herein described in detail. It should be understood, however, that the invention is not to be limited to the particular forms or methods disclosed, but to the contrary, the invention is to cover all modifications, equivalents and alternatives falling within the spirit and scope of the appended claims.

### Claims

- 1. A device for retraction of subcutaneous tissue to hold open a working space within a patient's body, comprising:
- an elongate member having proximal and distal ends, and having an arcuate cross-section defining an elongate passage therein; and
- a substantially transparent illumination member having a proximal portion connectable to a source of light,

  10 and a distal portion within the elongate passage for directing light from the proximal portion into the elongate passage.
  - 2. The device of claim 1, further comprising a handle extending from the proximal end of the elongate member.
- 15 3. The device of claim 2, wherein the proximal portion of the illumination member extends through the handle.
- 4. The device of claim 2, wherein the handle extends substantially perpendicularly to a longitudinal axis of the elongate member away from the elongate passage.
  - 5. The device of claim 1, wherein the elongate member comprises injection molded plastic.
  - 6. The device of claim 1, wherein the elongate member is substantially transparent.
- 7. The device of claim 1, wherein the illumination member comprises injection molded plastic.
  - 8. The device of claim 1, wherein the illumination member includes a plurality of lateral grooves in the distal

portion for diffusing light transmitted from the proximal portion into the distal portion towards a longitudinal working window defined by the elongate member.

- 9. The device of claim 8, wherein the lateral grooves extend progressively deeper into the distal portion towards a distal tip of the illumination member for diffusing light substantially uniformly along the longitudinal working window.
- 10. The device of claim 1, wherein the illumination 10 member extends along an inner surface of the elongate member.
- 11. The device of claim 10, wherein the distal portion of the illumination member and the inner surface of the elongate member include cooperating tabs and slots for securing the distal portion to the inner surface.
  - 12. The device of claim 1, further comprising a support member extending from the proximal end of the elongate member for facilitating access to the elongate passage.
- 20 13. The device of claim 12, wherein the support member extends substantially perpendicularly to a longitudinal axis of the elongate member towards the elongate passage.
- 14. The device of claim 12, wherein the support member is adjustable with respect to the proximal end of the 25 elongate member.
  - 15. The device of claim 12, wherein the support member and the proximal end of the elongate member include a plurality of cooperating tabs and slots for detachably

WO 00/15116

21

securing the support member to the proximal end in one of a plurality of positions with respect to one another.

- 16. The device of claim 15, wherein the support member includes a pair of arms defining an open space therebetween for accessing the elongate passage through the support member.
- 17. The device of claim 1, further comprising an adjustment mechanism on the proximal end of the elongate member for fixing the proximal end at one of a plurality of 10 heights.
  - The device of claim 1, wherein the elongate member circumferentially extended edges defining extended periphery.
- 19. A device for retraction of subcutaneous tissue to 15 hold open a working space within a patient's body, comprising:
  - a retractor member having an elongate portion including proximal and distal ends, and a handle extending from the proximal end of the elongate portion; and
- 20 a substantially transparent illumination member having a proximal portion connectable to a source of light, an intermediate portion extending through the handle, and a distal portion extending along a lower surface of the elongate portion, the distal portion including a surface for directing light from a source of light connected to the proximal portion therethrough.
  - The device of claim 19, wherein the elongate portion has a substantially arcuate cross-section.
- The device of claim 20, wherein the arcuate cross-30 section of the elongate portion defines an elongate passage

therein, and wherein the distal portion of the illumination member extends along the elongate passage.

- 22. The device of claim 19, wherein the lower surface of the illumination member comprises a substantially flat surface oriented away from the lower surface of the elongate portion.
- 23. The device of claim 22, wherein the distal portion of the substantially flat surface includes a plurality of lateral grooves for diffusing light through the illumination window.
  - 24. The device of claim 23, wherein the plurality of lateral grooves extend progressively deeper into the distal portion of the illumination member away from the proximal portion.
- 25. The device of claim 23, wherein the plurality of lateral grooves are in an upper surface of the distal portion of the illumination member.
- 26. The device of claim 19, wherein the handle comprises a sleeve through which the proximal portion of the illumination member extends.
  - 27. The device of claim 26, further comprising an adapter for attaching a source of light to the sleeve.
- 28. The device of claim 19, further comprising an adjustment mechanism proximate the proximal end of the elongate portion for fixing the proximal end at one of a plurality of predetermined heights.
  - 29. The device of claim 28, wherein the adjustment mechanism comprises a support member that is attachable to

the handle of the retractor member by a plurality of cooperating tabs and slots.

- 30. The device of claim 19, wherein the elongate portion and the handle are integrally molded together from molded plastic.
- 31. The device of claim 19, wherein the proximal, intermediate and distal portions of the illumination member are integrally molded together from molded plastic.
- 32. The device of claim 19, wherein the handle includes a cavity through which the intermediate portion of the illumination member extends.
  - 33. The device of claim 32, further comprising a handle cover attachable to the handle for substantially enclosing the cavity.
- 34. A method for holding open a working space during a surgical procedure involving a subcutaneous tissue structure of a patient using a retractor having an arcuate cross-section defining a longitudinal working window and having a substantially transparent illumination member thereon including a proximal portion connectable to a source of light and a distal portion above the longitudinal working window, the method comprising the steps of:

creating an incision at a location adjacent one end of the tissue structure;

25 dissecting a layer of tissue above a section of the tissue structure through the incision;

inserting the retractor into the incision;

advancing the retractor along the section of the tissue structure while orienting the longitudinal working 30 window towards the section of the tissue structure, the arcuate cross-section of the retractor holding open a


working space above the section of the tissue structure without external support;


connecting a source of light to the proximal portion of the illumination member, thereby transmitting light through the illumination member into the working space; and


performing a surgical procedure within the working space.


- 35. The method of claim 34, wherein the section of the tissue structure is harvested during the surgical procedure being performed within the working space.
  - 36. The method of claim 34, wherein the tissue structure comprises a saphenous vein.
- 37. The method of claim 34, wherein the incision is not more than about 4 cm long.
  - 38. The method of claim 34, wherein the distal portion of the illumination member includes a plurality of lateral grooves therein, and wherein the light transmitted through the illumination member is deflected by the plurality of lateral grooves towards the longitudinal working window.
    - 39. The method of claim 38, wherein the plurality of lateral grooves diffuses the light substantially uniformly along the longitudinal working window.
- 40. The method of claim 39, comprising the additional step of attaching a support member to a proximal end of the retractor after the retractor is inserted into the incision, the support member holding the proximal end of the retractor at a predetermined height above the tissue structure to facilitate access into the working space through the incision.

41. The method of claim 40, wherein the support member includes a base contoured to conform to the anatomy of the patient, and includes an open space therethrough for accessing the working space.

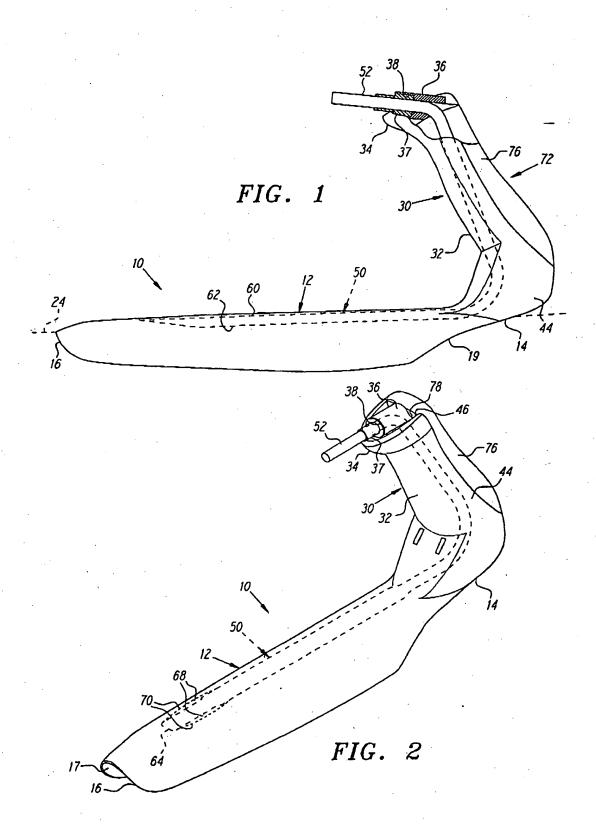

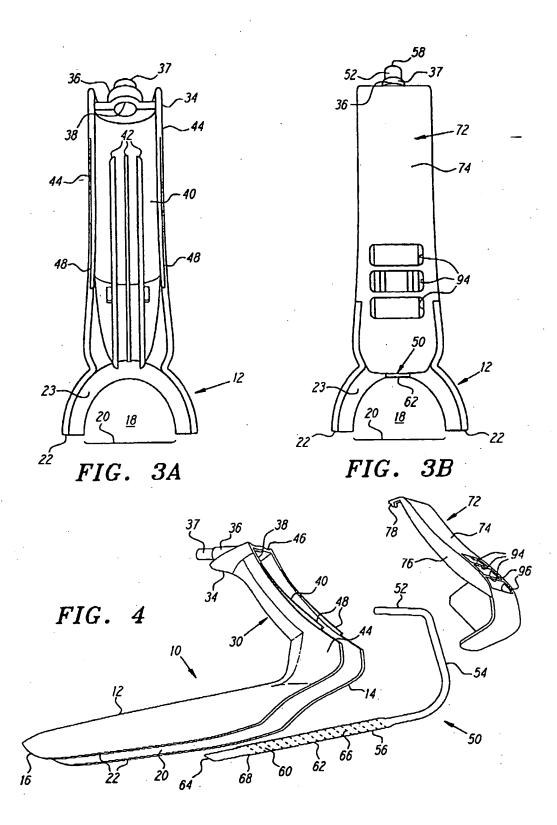

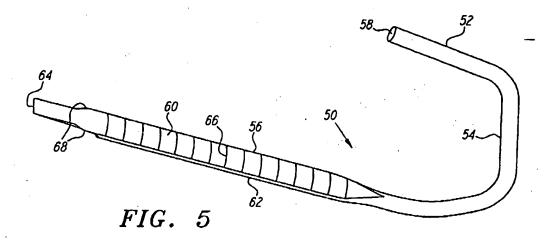

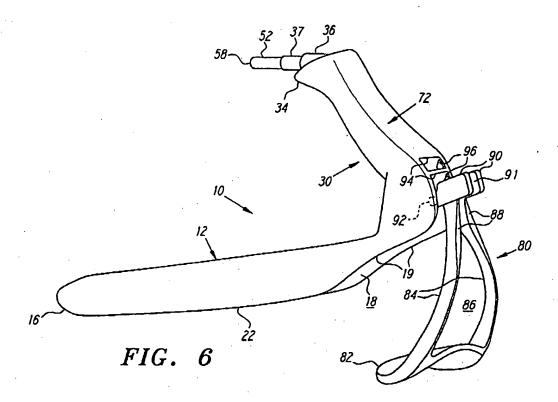

International application No. PCT/US99/19736

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) :A61B 17/00						
US CL :600/184 According to International Patent Classification (IPC) or to both national classification and IPC						
B. FIELDS SEARCHED						
Minimum documentation searched (classification system followed	by classification symbols)					
U.S. : 600/184, 190, 191, 197, 199, 201, 205, 210, 212, 226,						
Documentation searched other than minimum documentation to the	extent that such documents are included	in the fields searched				
Electronic data base consulted during the international search (nat	ne of data base and, where practicable,	search terms used)				
APS Search Terms; harvest?, saphenous vein, retact?, arcuate, light?	•					
C. DOCUMENTS CONSIDERED TO BE RELEVANT						
Category* Citation of document, with indication, where app	propriate, of the relevant passages	Relevant to claim No.				
X SAPHLITE, Saphenous Vein Instrumentation, Genzyme Surgi		1-3, 10, 11, 18, 34-40				
Y Cardio Vascular Group, April 1998, pa	CardioVascular Group, April 1998, pages 1-4. See page 2.  5-8					
X GB 2 078 526 A (KOCKOTT) 13 Janu	GB 2 078 526 A (KOCKOTT) 13 January 1982, Fig. 3.					
Y	5-8					
X GB 2 133 694 A (WENDT et al.) 01 August 1984, Fig. 1. 19, 26, 27, 30-33						
Further documents are listed in the continuation of Box C						
Special categories of cited documents:     A* document defining the general state of the art which is not considered.	"T" later document published after the ir date and not in conflict with the ap the principle or theory underlying t	plication but cited to understand				
*E* earlier document published on or after the international filing date	"X" document of particular relevance; considered novel or cannot be considered novel or cannot be considered novel or cannot be considered.	the claimed invention cannot be dered to involve an inventive step				
cited to establish the publication date of another citation or other special reason (as specified)  special reason (as specified)  -y-  document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination						
means  *P* document published prior to the international filing date but later than *&* document member of the same patent family						
Date of the actual completion of the international search	Date of mailing of the international s	earch report				
27 OCTOBER 1999 17 NOV 1999						
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231  Approfized officer  Approfized officer  JEFFREY A. SMITH						
Facsimile No. (703) 305-3230	Telephone No. (703) 308-3588					

09/150,909

#### WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



# INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

- (51) International Patent Classification 6: (11) International Publication Number: WO 00/15116 A61B 17/00 A1 (43) International Publication Date: 23 March 2000 (23.03.00)
- (21) International Application Number: PCT/US99/19736
- (22) International Filing Date: 30 August 1999 (30.08.99)
- (30) Priority Data:

10 September 1998 (10.09.98)

- (71) Applicant: GENERAL SURGICAL INNOVATIONS, INC. [US/US]; 10460 Bubb Road, Cupertino, CA 95014 (US).
- (72) Inventors: RYDIN, Jeffrey; 652 Lincoln Avenue, Winnetka, IL 60093 (US). PALERMO, Thomas, J.; 4261 Leigh Avenue, San Jose, CA 95125 (US). PEARTREE, Kenneth, A.; 840 Meridian Way #75, San Jose, CA 95126 (US).
- (74) Agent: ENGLISH, William, A.; Lyon & Lyon LLP, Suite 4700, 633 West Fifth Street, Los Angeles, CA 90071-2066 (US).

(81) Designated States: CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT,


#### Published

With international search report.

## (54) Title: DIRECT VISION SUBCUTANEOUS TISSUE RETRACTOR

#### (57) Abstract

A vascular harvest retractor device (10) includes an elongate member (12) having an arcuate cross section defining an elongate passage therein, and a handle (30) integrally molded to its proximal end (14). A transparent illumination member (50) has a proximal portion (52) connectable to a light source, and a distal portion within the elongate passage. The distal portion of the illumination member extends along an inner surface of the elongate member which includes a plurality of grooves for diffusing light transmitted from the proximal portion into the distal portion uniformly into, and along the elongate passage. The illumination member may be attached to the elongate member, and/or handle. The handle may include a cavity through which the illumination member extends, and to which a handle cover may be attached. The device may also include a support member attachable to the proximal end of the elongate member to further facilitate visualization of, and/or access into the elongate pas-

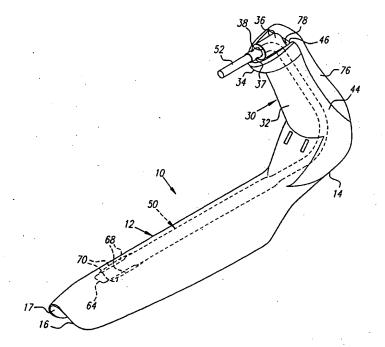

### FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
ΑZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA -	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania *	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JР	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		•
CU	Cuba	KZ	Kazakstan	R	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	Ц	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

WO 00/15116

#### PCT/US99/19736

#### DESCRIPTION

# <u>Direct Vision Subcutaneous Tissue Retractor</u>

This application is a continuation-in-part of application Serial No. 08/925,967, filed September 9, 1997, which is a continuation-in-part of application Serial No. 08/867,133, filed June 2, 1997, the disclosures of which are expressly incorporated herein by reference.

### Field Of The Invention

The present invention relates generally to surgical retractors, and more particularly to vascular retractors that are self-supporting and/or provide an illuminated longitudinal working window for vascular harvesting procedures.

### Background Of The Invention

Numerous surgical procedures, such as coronary bypass 15 surgery, reverse or in-situ femoral-popliteal or femoraltibial bypass procedures and the like, may involve accessing and/or harvesting the saphenous vein or other blood vessel of a patient. For example, in coronary bypass surgery, a vein may be harvested from elsewhere in the patient's body 20 and grafted into place between the aorta and a coronary artery. It is generally preferred to use a vein taken from the patient undergoing the surgery, as the patient is a ready source of suitable veins that will not be rejected by the body after grafting. 25 In particular, the saphenous vein in the leg is often used for this procedure, for example, because the saphenous vein is typically 3-5 mm in diameter comparable in size to the coronary Furthermore, the venous system of the leg is sufficiently redundant that the saphenous vein may be removed and the remaining veins in the leg will continue to provide adequate

WO 00/15116 PCT/US99/19736

.2

return blood flow. Alternatively, the cephalic vein in the arm may sometimes be used.

Traditionally, to harvest the saphenous vein, an open surgical procedure has been used to expose and remove the 5 vein from the leg. Because of wound morbidity and patient pain often encountered in such procedures, minimally invasive access has become increasingly preferred.

For example, instead of an open procedure, interrupted incision method may be used in which a series of incisions with skin bridges between them are made between the groin, the knee and/or the ankle. Through incisions, the surgeon dissects the vein from surrounding tissues, lifts the vein from the tissues, and divides and ligates the various tributary veins that feed 15 into the saphenous vein. Once the vein is completely mobilized, the surgeon cuts the ends of the vein and removes it from the leg. The incisions in the leg are closed, and the vein is prepared for implantation.

10

20

25

30

. 35

During an interrupted incision procedure, a retractor may be used to assist in visualization of the vein. retractor typically includes a wide, flat shaft with a handle on its proximal end made from stainless steel. retractor may be inserted into an incision and directed along a previously dissected path over a section of vein to be harvested. The handle of the retractor may then be lifted away from the surface of the leg, thereby maintaining the space created by dissection under the shaft adjacent the vein in an open condition. Such retractors may include a source of light connected to the proximal end, and light from the light source may be projected into the space to facilitate visualization of the vein.

In an alternative method, vein harvesting may be accomplished using an endoscopic procedure. One or more incisions may be made at selected locations providing access to the vein being harvested. For example, to harvest the saphenous vein, an incision may be made at

the groin, at the knee, and/or at the ankle. A tunneling instrument, such as a blunt or soft-tipped dissector, may be utilized to dissect subcutaneous tissue along the anterior surface of the vein being harvested. Such instruments generally include an elongate member, which fabricated from transparent, opaque or other material, having a rounded distal end and a passage therein for receiving an endoscope, the endoscope visualization within or beyond the walls of the instrument.

10 The tunneling instrument is inserted into the incision and advanced or pushed along between tissue layers to dissect and expose the saphenous vein. The tip of the instrument is generally kept near or in contact with the vein as the instrument is advanced along, thereby creating a 15 small tunnel adjacent the anterior surface of the vein. inflatable balloon (alternatively provided in a collapsed condition on the tunneling instrument prior to insertion into the incision) may be introduced into the tunnel, and inflated to further dissect the tunnel to an appropriate 20 size for surgery.

Once the desired length of vein is exposed and an appropriate tunnel developed, the balloon and/or tunneling instrument may be removed, and a retractor, typically a wide flat shaft with a handle on its proximal end, may be 25 inserted into the incision and directed along the dissected path over the section of vein to be harvested. The handle of the retractor may then be lifted away from the surface of the leg, thereby maintaining the working space created by dissection under the shaft adjacent the vein in an open condition. Surgical instruments may then be inserted into the working space to dissect the tissues surrounding the vein, ligate tributary veins, and mobilize the vein. endoscope may be provided in a passage in the retractor or inserted directly into the working space to visualization during the harvesting procedure.

WO 00/15116 PCT/US99/19736

. 4

Retractor devices in vein harvesting procedures often For example, such retractors typically have limitations. require external support to hold the retractor away from the surface of the vein and maintain the working space. surgeon or physician's assistant may have to hold a handle on the retractor, preventing both hands from being free for procedure or may even require an assistant. external Alternatively, an mechanical support may provided to hold the retractor, but such a support may interfere with access to the operative site.

Some retractors include a distal hood capable of maintaining a working space thereunder. These hoods, however, only create a limited self-supported working space, requiring that the retractor be moved when it is desired to work in a new location. Such retractors also generally require external support to provide access along the retractor shaft between the incision and the hooded space.

Accordingly, there is a need for a device for retracting subcutaneous tissues and/or for holding open a working space during surgical procedures that provides improved illumination and/or visualization within the space.

#### Summary Of The Invention

10

15

20

25

30

35

The present invention is directed to self-supporting and/or provide retractors that are illuminated working space for vein harvesting or similar procedures. In one aspect of the present invention, a device for retraction of subcutaneous tissue is provided that includes an elongate member having proximal and distal and having an arcuate cross-section defining an The device also includes a elongate passage therein. substantially transparent illumination member or lightpipe having a proximal portion connectable to a source of light, and a distal portion within the elongate passage for directing light from the proximal portion into the elongate passage.

15

25

30

35

5

The elongate member is preferably formed from injection molded plastic, and, if desired, may be formed from a substantially transparent material for facilitating visualization beyond the walls of the elongate member. 5 preferred form, the device also includes a handle extending from and preferably integrally molded to the proximal end of the elongate member. More preferably, the handle extends substantially perpendicularly to a longitudinal axis of the elongate member away from the elongate passage which may facilitate visualization of and/or access to the elongate passage.

The illumination member preferably extends along an inner surface of the elongate member and may include an illumination window directed towards the elongate passage. The distal portion of the illumination member and the inner surface of the elongate member may include cooperating tabs slots for securing the distal portion the illumination member to the inner surface. The proximal and distal portions of the illumination member are preferably integrally molded together from injection molded plastic to 20 facilitate the passage of light from a light source at the proximal portion to the distal portion.

The illumination member preferably includes a plurality of lateral grooves in the distal portion, e.g., in an upper surface of the distal portion, for diffusing transmitted from the proximal portion into the distal portion, e.g. through a lower surface of the distal portion towards a longitudinal working window defined by elongate member. More preferably, the lateral grooves extend progressively deeper into the distal portion in the direction towards a distal tip of the illumination member for diffusing light substantially uniformly along elongate passage and/or the longitudinal working window. Thus, an external source of light may be used to illuminate the longitudinal working window along the elongate passage to facilitate visualization of a blood vessel, such as the

WO 00/15116 PCT/US99/19736

• 6

saphenous vein, or other subcutaneous tissue structure, during vein harvest or other procedures.

The device may also include a support member extending the proximal end of the elongate member facilitating access to and/or visualization of the elongate The support member is preferably attachable to a handle or handle cover (described below) on the proximal end of the elongate member. In addition, the support member is preferably adjustable and extends substantially perpendicularly to a longitudinal axis of the elongate member towards the elongate passage when attached to the handle or handle cover of the elongate member. For example, in a preferred form, the support member and the proximal end of the elongate member and/or the handle may include a set of cooperating tabs and slots for detachably securing the support member to the elongate member in one of a plurality of available positions, thereby providing adjustability. For example, the support member may be attached to the elongate member at one of a plurality of incremental positions to raise the proximal end of the elongate member to a predetermined height and/or to further tent the entrance of an incision to facilitate visualization and/or access to the working space held open by the device through the incision.

20

In a preferred form, the support member includes a pair of arms defining an open space therebetween to straddle the access path to the elongate passage through the support member. The arms may be attached at their lower ends to a base, preferably having a slightly curved shape contoured to fit the surface of a patient's anatomy. The support member may facilitate use of the retraction device in a hands-free capacity, i.e., the support member may be sufficiently stable to support the elongate member on its own, thereby allowing a surgeon to use both hands during a vein harvesting or similar procedure.

25

30

35

In another aspect of the present invention, a device for retraction of subcutaneous tissue is provided that includes a retractor member having an elongate portion including proximal and distal ends, a handle extending from proximal end of the retractor portion, substantially transparent illumination member having proximal portion connectable to a source of light, intermediate portion extending through the handle, and a distal portion extending along a lower surface of the The distal portion of the illumination elongate portion. member preferably includes a surface for directing light transmitted through the illumination member from a source of light connected to the proximal portion towards a working space held open by the device.

The handle includes a sleeve through which the proximal portion of the illumination member extends, which may include an adapter for attaching a source of light to the sleeve. The handle preferably includes a cavity through which the intermediate portion of the illumination member extends, and a handle cover attachable over the cavity.

To assemble the device, the proximal portion of the illumination member may be directed through the sleeve, while the distal portion of the illumination member is advanced along the lower surface of the elongate portion, until the intermediate portion enters the cavity in the handle. Preferably, the distal portion of the illumination member and the elongate portion include cooperating tabs and slots for substantially securing the distal portion to the lower surface of the elongate portion. The intermediate portion of the illumination member may substantially engage guide rails within the cavity to further secure the illumination member.

A handle cover may be placed over the cavity, and substantially secured to the handle, to thereby substantially enclose the cavity and/or to further secure the intermediate portion. The assembled device may then be

WO 00/15116 PCT/US99/19736

8

packaged and provided to a surgeon or other user preassembled. A support member, such as that described above, may also be provided with the device for supporting the elongate portion of the device, as previously described.

5

15

20

25

30

35

The device may then be used in a method for retracting tissue to maintain a working space during a surgical procedure involving a subcutaneous tissue structure of a patient. An incision may be created at a location adjacent one end of the tissue structure, and a layer of tissue may be dissected above a section of the tissue structure through the incision. The retractor may be inserted into the incision, and advanced along the section of the tissue structure while being oriented. The retractor may hold open a longitudinal working space above the tissue structure and arcuate cross-section of the Preferably, the retractor is self-supporting and maintains the working space without external support. A source of light may be connected to the proximal portion of the illumination member, thereby transmitting light through the illumination member into the working space, and a surgical procedure may then be performed within the working space.

If desired, a second incision may be created adjacent to another length of the tissue structure, and the retractor used to hold open another working space, for example, to allow longer sections of the saphenous vein to be harvested for use in coronary bypass graft surgery. In addition, the support member may be attached to the proximal end of the device after being inserted into the incision, the support member holding the proximal end of the retractor at a predetermined height above the tissue structure facilitate access into the working space through incision.

Thus, the device may be used during a vein harvesting procedure to harvest a section of the saphenous vein through one or more incisions, each of which are preferably not more than about 4 cm long. The procedure may substantially

reduce the wound morbidity and/or patient pain often associated with open harvesting procedures, while not requiring use of an endoscope and the more demanding surgical methods required for endoscopic surgery.

Additional objects and features of the present invention will become apparent from consideration of the following description taken in conjunction with the accompanying drawings.

## Brief Description Of The Drawings

FIG. 1 is a side view of a first preferred embodiment of a retractor device in accordance with the present invention.

FIG. 2 is a perspective view of the retractor device of FIG. 1, including a lightpipe shown in phantom.

FIGS. 3A and 3B are back views of the retractor device of FIG. 1, with the handle cover removed and attached, respectively.

FIG. 4 is an exploded perspective view of the retractor device of FIG. 1

FIG. 5 is a perspective detail of a lightpipe for use with the retractor device of FIG. 1.

FIG. 6 is a perspective view of an alternative embodiment of the retractor device of FIG. 1, including an adjustable auxiliary support member attached to a handle of the retractor device.

# Detailed Description Of The Preferred Embodiments

Turning now to the drawings, FIGS. 1-6 show a preferred embodiment of a retractor device 10 in accordance with one aspect of the present invention. The retractor device 10 includes an elongate member 12, a handle 30, a lightpipe 50, and a handle cover 72.

The elongate member 12 has a proximal end 14, a distal end 16, and an arcuate or "C" cross-section, as best seen in FIGS. 3A and 3B. The arcuate cross-section may define a

portion of the periphery of a circle, an ellipse or similar The distal end 16 is preferably rounded or streamlined to minimize tissue trauma when the retractor device 10 is directed along a dissected space in a patient 5 (not shown), and may include a distal opening 17 to allow access beyond the distal end 16. The elongate member 12 defines an elongate passage 18 therein extending along a longitudinal axis 24 between the proximal and distal ends 14, 16. The elongate member 12 also defines a longitudinal working window 20 along the elongate passage 18 between longitudinal edges 22 of the elongate member 12.

10

15

20

30

35

The elongate member 12 may be fabricated from any suitable metal or plastic material, but preferably is formed from injection molded polymer, such as polycarbonate, or other engineering plastics. Alternatively, the elongate member may be formed in a manner which facilitates cleaning and/or of a semi-rigid material, such as polyetherimide, which may be suitable for sterilization and reuse. material may also be substantially transparent to facilitate visualization beyond or through the walls of the elongate member 12.

12 also elongate member may The circumferentially extended edges or curved tabs (not shown) integrally formed along a portion of the edges 22 of the elongate member 12 and extending peripherally from the edges 22, thereby defining an extended periphery (not shown). extended edges may increase the size of the working space held open by the retractor device 10 since the extended periphery further tents the working space, particularly at the location adjacent the extended edges. discussion of such extended edges may be found in co-pending application Serial No. 08/867,133, filed June 2, 1997, the disclosure of which is expressly incorporated herein by reference.

The handle 30 is preferably integrally molded to and extends from the proximal end 14 of the elongate member 12,

although alternatively the handle 30 may be provided as a separate component (not shown) attachable to the elongate The handle 30 preferably extends substantially member 12. perpendicularly to the longitudinal axis 24 away from the elongate passage 18, thereby facilitating manipulation of the retractor device 10 during a surgical procedure. handle 30 includes a front surface 32 and side surfaces 44, preferably having a generally curved shape for facilitating grasping of the handle 32, and includes an upper end 34.

A cylindrical sleeve 36 is integrally molded to the 10 . upper end 34, including an aperture 38 communicating with a cavity 40 within the handle 30 defined by the front and side surfaces 32, 44. A universal cable adapter 37 may be attached to the cylindrical sleeve 36, for example, 15 insert-molding. The universal cable adapter 37 may be formed from aluminum or similar material, and may include threads for securing a similarly threaded light cable or other source of light (not shown) to the cylindrical sleeve Alternatively, the adapter 37 may include other connectors for cooperatively mating with a light source. 20

The cavity 40 extends substantially between the upper end 34 of the handle 30 and the proximal end 14 of the elongate member 12. A plurality of guide rails 42 are integrally molded to the handle 30 within the cavity 40 and extend at least partially between the aperture 38 in the cylindrical sleeve 36 and the elongate passage 18 within the elongate member 12. The handle 30 may also include a pair of recesses 46 in the upper end 34 and elongate tabs 48 along the side surfaces 44 for cooperating with tabs 78 on 30 the handle cover 72 to substantially secure the handle cover 72 to the handle 30, as described further below.

With particular reference to FIGS. 4 and 5, lightpipe 50 is a substantially transparent illumination member, preferably formed from injection molded plastic that allows efficient transmission of light therethrough, such as polystyrene. The lightpipe 50 includes a proximal portion 52, a curved intermediate portion 54 and a distal portion 56, preferably integrally molded as a single piece to prevent substantial loss of light passing therethrough. The proximal and intermediate portions 52, 54 preferably have a substantially cylindrical shape to facilitate the transmission of light therethrough from a proximal end 58 of the lightpipe 50.

10

20

25

30

35

56 generally The distal portion has а flat configuration defining an upper surface 60 and a lower surface 62, and terminates in a distal tip 64. Preferably, the upper surface 60 includes a plurality of lateral grooves 66 extending into the upper surface 60 for deflecting light passing along the distal portion 56 through the lower surface 62, as described further below. More preferably, the lateral grooves 66 extend substantially perpendicular to the longitudinal axis 24 and penetrate progressively deeper into the upper surface 60 of the distal portion 56 in the direction of the distal tip 64 to diffuse light essentially perpendicularly to and substantially uniformly along the longitudinal axis 24 within the elongate passage 18. bottom of the lateral grooves 66 may be ramped at predetermined angle, e.g., oblique with respect to the longitudinal axis 24, to further deflect light substantially perpendicularly to the longitudinal axis 24 towards the longitudinal working window 20.

In alternative forms, the distal portion 56 of the lightpipe 50 may be substantially cylindrical (not shown) and the lateral grooves 66 may be provided on the upper half of the distal portion 56 and/or on the lower half of the distal portion 56 (not shown). In a further alternative, the lateral grooves 66 may be spaced progressively closer together in the direction of the distal tip 64 (not shown) to further facilitate substantially uniform diffusion of light from the distal portion 56.

The distal portion 56 also includes a pair of ramped tabs 68 proximate the distal tip 64 for cooperatively

engaging slots 70 formed on an inside surface 23 of the elongate member 12 for substantially securing the distal portion 56 of the lightpipe 50 to the elongate member 12. To attach the lightpipe 50 to the elongate member 12, the proximal portion 52 of the lightpipe 50 is directed through the aperture 38 in the handle 30 until the intermediate portion 54 substantially engages the guide rails 42 in the cavity 40. Simultaneously, the distal portion 56 is directed along the inside surface 23 of the elongate member 12 until the ramped tabs 68 substantially engage the slots 70.

With particular reference to FIGS. 3B and 4, the handle cover 72 may then be attached to the handle 30 substantially enclose the cavity 40 and/or to further substantially secure the lightpipe 50 therein. 15 The handle cover 72 includes a back surface 74 and side surfaces 76 having a configuration complementary to the configuration of The handle cover 72 includes tabs 78 adapted the handle 30. to be received in the recesses 46 in the upper end 34 of the handle 30 such that the handle cover 72 may be attached 20 thereby to the handle 30. Preferably, when the handle cover 72 is received on the handle 30, the elongate tabs 48 on the handle 30 substantially engage the side walls 76 of the handle cover 72 to further secure the handle cover 72 onto the handle 30. The cooperating tabs 78 and recesses 46 and the elongate tabs 48 may substantially secure the handle cover 72 onto the handle 30 such that adhesives may be unnecessary.

For a reusable version of the retractor device 10, the elongate member 12, the lightpipe 50 and the handle cover 72 may be capable of disassembly for cleaning and/or sterilization. Alternatively, in a single use version, the elongate member 12, the lightpipe 50 and handle cover 72 may be substantially permanently attached together prior to packaging, thereby providing a ready-to-use device. For such a single use version, the handle cover 72 may be bonded

WO 00/15116 PCT/US99/19736

14

to the handle 30 using adhesives and the like, either alone or in conjunction with cooperating tabs and recesses.

During a procedure, a light cable or other source of light (not shown) may be coupled to the proximal portion 52 of the lightpipe 50, preferably to the universal cable adapter 37, such that light is directed into the proximal end 58 of the lightpipe 50. Light from the light cable then passes through the proximal and intermediate portions 52, 54 and enters the distal portion 56. As the light travels towards the distal tip 64 of the distal portion 56, the 10 light encounters the lateral grooves 66, which deflect the light through the lower surface 62. The depth of the lateral grooves 66 into the upper surface 60 may selectively altered to vary illumination along the distal portion 56 of the lightpipe 50. Thus, light may be diffused in any preferred manner through the lower surface 62 along the distal portion 56.

The handle 30 of the retractor device 10 may be grasped in one hand, and the elongate member 12 inserted into an incision leading to a dissected space, for example, a transverse or longitudinal incision about 4 cm long, to retract subcutaneous tissue to hold open a dissected anatomic space therein. Once the elongate member 12 is positioned within the space, for example, along a vein being harvested, the lightpipe 50 transmits light into the space, particularly to the operating area within longitudinal working window 20 of the elongate member 12. The distal portion 56 of the lightpipe 50 preferably the light substantially uniformly longitudinal axis 24, thereby facilitating visualization of the vein and/or branches for easy ligation and removal.

20

30

35

In addition, as shown in FIG. 6, the retractor device 10 may include an auxiliary support member or stand 80 for elevating the proximal end 14 of the retractor device 10. The support member 80 includes a base 82 and a pair of legs 84 that are preferably integrally molded together. The base

82 preferably has a slightly curved shape contoured to fit the surface of a patient's anatomy, and the pair of legs 84 preferably extend from opposite sides of the base 82 towards one another to define a substantially triangular open space 86, facilitating access to the elongate passage 18.

Upper ends 88 of the legs 84 are disposed in close proximity to one another, and include tabs 90 adjacent one another that define a gap 91 therebetween. A hub 92 extends from an outer surface of each tab 90, i.e., opposite the gap 91. Preferably, the legs 82 are semi-rigid, i.e., are sufficiently rigid to support the retractor device 10, but are sufficiently flexible that the tabs 90 may be compressed towards one another, but resiliently return to define the narrow gap 91.

The handle cover 72 includes a plurality of transverse 15 slots 94 having a width similar to the uncompressed spacing of the tabs 90 such that the tabs 90 may be received in an individual transverse slot 94. The transverse slots 94 also include a pair of recesses 96 therein for receiving the hubs To attach the support member 80 to the retractor device 20 92. 10, the tabs 90 are directed towards one another, i.e., reducing the width of the gap 91 between them, and then inserted into a selected transverse slot 94 in the handle cover 30, the compressed profile providing clearance for the hubs 92 to enter the transverse slot 94. 25 The tabs 90 may then be released, the legs 84 resiliently returning the tabs 90 toward the uncompressed profile, apart from one another until the hubs 92 engage the recesses 96. proximal end 14 of the retractor device 10 may be adjusted to a predetermined height above the surface of a patient's 30 leg simply by moving the tabs 90 of the support member 80 to a corresponding transverse slot 94 in the handle cover 72.

With the support member 80 in place at a predetermined height, the proximal end 14 of the elongate member 12 may be raised to facilitate the performance of a surgical procedure within the elongate passage 18. For example, the open space

WO 00/15116 PCT/US99/19736

16

86 may facilitate visualization within the elongate passage 18. In addition, the support member 80 may facilitate the direction of surgical instruments (not shown) through the open space 86 and into the elongate passage 18. The support member 80 may also provide hands-free retraction, enabling a surgeon to use both hands during the procedure. In addition to the support member 80, the elongate member 12 may include recessed portions 19 adjacent the proximal end 14 to provide an enlarged entrance into the elongate passage 18, for example, to further facilitate visualization and/or the direction of surgical instruments into the elongate passage 18.

10

15

20

25

30

35

Alternatively, other adjustment mechanisms may also be provided that may, for example, be attachable or permanently fixed to the proximal end 14. The adjustment mechanism may fix the proximal end 14 at one of a plurality of heights to tent the incision and/or to facilitate access to the working space. For example, a raised frame (not shown) may be attachable to the patient's anatomy, such as by a strap around their leg, to which the proximal end 14 may attached. The frame should include an open therethrough to facilitate the introduction of surgical instruments into the elongate passage 18.

important feature of a retractor device accordance with the present invention is the arcuate crosssection which enables the device to retract and maintain subcutaneous tissue and hold open a working space during a surgical procedure. Conventional methods may be used to incise and dissect to create a subcutaneous space initially, for example, in preparation for vein harvesting from a patient's leg. Alternatively, U.S. Patent No. 5,601,581, issued to Fogarty et al., discloses an apparatus and method dissecting a subcutaneous suitable for space. disclosure of this reference and any others cited therein are expressly incorporated herein by reference.

25

30

To summarize such a useful procedure, a section of a tissue structure, for example a nerve or vein, especially the saphenous vein, may be selected to be harvested. incision may be created at a location adjacent to one end of the selected structure, such as at the groin or knee. tunneling instrument, such as a blunt or soft-tipped dissector, possibly including an inflatable balloon thereon, may be inserted into the incision and advanced along between tissue layers to identify the selected tissue structure. The tunneling instrument may be advanced along the anterior 10 surface of the tissue structure and/or a balloon on the tunneling instrument may be inflated to create a dissected space of a desired size. Once the desired dissected space is developed, the balloon may be deflated, and the tunneling instrument may be removed from the dissected space through 15 the incision.

A retractor in accordance with the present invention may then be inserted into the incision and directed along the dissected space while orienting the open side of the "C" shaped cross-section, e.g., the longitudinal working window 20, towards the tissue structure to hold open a working space above the tissue structure. The lightpipe 50 provides illumination within the working space and, in particular, facilitates visualization of a surgical site along the tissue structure within the working window 20. The arcuate shape of the retractor device 10 allows the subcutaneous tissues anterior to the surgical site, such as the tissues anterior to the saphenous vein, to be held up and away from the surgical site without needing external support. longitudinal edges 22 of the retractor device 10 abut the subcutaneous tissues adjacent the anterior surface of the tissue structure, and the longitudinal working window 20 facilitates access along a desired length of the tissue structure, for example, of a vein being harvested. instruments may be introduced into the incision and directed along the working space to any point along the length of the

PCT/US99/19736 WO 00/15116

18

longitudinal working window 20 without having to relocate the retractor device during a surgical procedure, such as a vein harvesting procedure.

If desired, a second incision may be created and the procedure repeated at another location on the patient's leg adjacent to the first incision, the retractor device holding open a second working space to facilitate additional tissue structure to be ligated and/or harvested. Thus, a retractor device 10 in accordance with the present invention may allow a relatively long section of a vein, nerve or other tissue structure to be harvested through a series of relatively small incisions spaced apart from one another.

10

20

While the invention is susceptible to modifications, and alternative forms, specific examples 15 thereof have been shown in the drawings and are herein described in detail. It should be understood, however, that the invention is not to be limited to the particular forms or methods disclosed, but to the contrary, the invention is to cover all modifications, equivalents and alternatives falling within the spirit and scope of the appended claims.

#### Claims

- 1. A device for retraction of subcutaneous tissue to hold open a working space within a patient's body, comprising:
- an elongate member having proximal and distal ends, and having an arcuate cross-section defining an elongate passage therein; and
  - a substantially transparent illumination member having a proximal portion connectable to a source of light, and a distal portion within the elongate passage for directing light from the proximal portion into the elongate passage.
  - 2. The device of claim 1, further comprising a handle extending from the proximal end of the elongate member.
- 3. The device of claim 2, wherein the proximal portion of the illumination member extends through the handle.
- 4. The device of claim 2, wherein the handle extends substantially perpendicularly to a longitudinal axis of the elongate member away from the elongate passage.
  - 5. The device of claim 1, wherein the elongate member comprises injection molded plastic.
  - 6. The device of claim 1, wherein the elongate member is substantially transparent.
- 7. The device of claim 1, wherein the illumination member comprises injection molded plastic.
  - 8. The device of claim 1, wherein the illumination member includes a plurality of lateral grooves in the distal

WO 00/15116

15

PCT/US99/19736

portion for diffusing light transmitted from the proximal portion into the distal portion towards a longitudinal working window defined by the elongate member.

- 9. The device of claim 8, wherein the lateral grooves
  5 extend progressively deeper into the distal portion towards
  a distal tip of the illumination member for diffusing light
  substantially uniformly along the longitudinal working
  window.
- 10. The device of claim 1, wherein the illumination 10 member extends along an inner surface of the elongate member.
  - 11. The device of claim 10, wherein the distal portion of the illumination member and the inner surface of the elongate member include cooperating tabs and slots for securing the distal portion to the inner surface.
    - 12. The device of claim 1, further comprising a support member extending from the proximal end of the elongate member for facilitating access to the elongate passage.
- 20 13. The device of claim 12, wherein the support member extends substantially perpendicularly to a longitudinal axis of the elongate member towards the elongate passage.
- 14. The device of claim 12, wherein the support member is adjustable with respect to the proximal end of the 25 elongate member.
  - 15. The device of claim 12, wherein the support member and the proximal end of the elongate member include a plurality of cooperating tabs and slots for detachably

securing the support member to the proximal end in one of a plurality of positions with respect to one another.

- 16. The device of claim 15, wherein the support member includes a pair of arms defining an open space therebetween for accessing the elongate passage through the support member.
- 17. The device of claim 1, further comprising an adjustment mechanism on the proximal end of the elongate member for fixing the proximal end at one of a plurality of heights.
  - 18. The device of claim 1, wherein the elongate member includes circumferentially extended edges defining an extended periphery.
- 19. A device for retraction of subcutaneous tissue to 15 hold open a working space within a patient's body, comprising:
  - a retractor member having an elongate portion including proximal and distal ends, and a handle extending from the proximal end of the elongate portion; and
- a substantially transparent illumination member having a proximal portion connectable to a source of light, an intermediate portion extending through the handle, and a distal portion extending along a lower surface of the elongate portion, the distal portion including a surface for directing light from a source of light connected to the proximal portion therethrough.
  - 20. The device of claim 19, wherein the elongate portion has a substantially arcuate cross-section.
- 21. The device of claim 20, wherein the arcuate cross-30 section of the elongate portion defines an elongate passage

therein, and wherein the distal portion of the illumination member extends along the elongate passage.

- 22. The device of claim 19, wherein the lower surface of the illumination member comprises a substantially flat surface oriented away from the lower surface of the elongate portion.
- 23. The device of claim 22, wherein the distal portion of the substantially flat surface includes a plurality of lateral grooves for diffusing light through the illumination window.
  - 24. The device of claim 23, wherein the plurality of lateral grooves extend progressively deeper into the distal portion of the illumination member away from the proximal portion.
- 25. The device of claim 23, wherein the plurality of lateral grooves are in an upper surface of the distal portion of the illumination member.
- 26. The device of claim 19, wherein the handle comprises a sleeve through which the proximal portion of the illumination member extends.
  - 27. The device of claim 26, further comprising an adapter for attaching a source of light to the sleeve.
- 28. The device of claim 19, further comprising an adjustment mechanism proximate the proximal end of the 25 elongate portion for fixing the proximal end at one of a plurality of predetermined heights.
  - 29. The device of claim 28, wherein the adjustment mechanism comprises a support member that is attachable to

the handle of the retractor member by a plurality of cooperating tabs and slots.

- 30. The device of claim 19, wherein the elongate portion and the handle are integrally molded together from molded plastic.
  - 31. The device of claim 19, wherein the proximal, intermediate and distal portions of the illumination member are integrally molded together from molded plastic.
- 32. The device of claim 19, wherein the handle 10 includes a cavity through which the intermediate portion of the illumination member extends.
  - 33. The device of claim 32, further comprising a handle cover attachable to the handle for substantially enclosing the cavity.
- 34. A method for holding open a working space during a surgical procedure involving a subcutaneous tissue structure of a patient using a retractor having an arcuate cross-section defining a longitudinal working window and having a substantially transparent illumination member thereon including a proximal portion connectable to a source of light and a distal portion above the longitudinal working window, the method comprising the steps of:

creating an incision at a location adjacent one end of the tissue structure;

dissecting a layer of tissue above a section of the tissue structure through the incision;

inserting the retractor into the incision;

advancing the retractor along the section of the tissue structure while orienting the longitudinal working window towards the section of the tissue structure, the arcuate cross-section of the retractor holding open a


working space above the section of the tissue structure without external support;

connecting a source of light to the proximal portion of the illumination member, thereby transmitting 5 light through the illumination member into the working space; and


performing a surgical procedure within the working space.

- 35. The method of claim 34, wherein the section of the tissue structure is harvested during the surgical procedure being performed within the working space.
  - 36. The method of claim 34, wherein the tissue structure comprises a saphenous vein.
- 37. The method of claim 34, wherein the incision is not more than about 4 cm long.
  - 38. The method of claim 34, wherein the distal portion of the illumination member includes a plurality of lateral grooves therein, and wherein the light transmitted through the illumination member is deflected by the plurality of lateral grooves towards the longitudinal working window.
  - 39. The method of claim 38, wherein the plurality of lateral grooves diffuses the light substantially uniformly along the longitudinal working window.
- 40. The method of claim 39, comprising the additional step of attaching a support member to a proximal end of the retractor after the retractor is inserted into the incision, the support member holding the proximal end of the retractor at a predetermined height above the tissue structure to facilitate access into the working space through the incision.

41. The method of claim 40, wherein the support member includes a base contoured to conform to the anatomy of the patient, and includes an open space therethrough for accessing the working space.

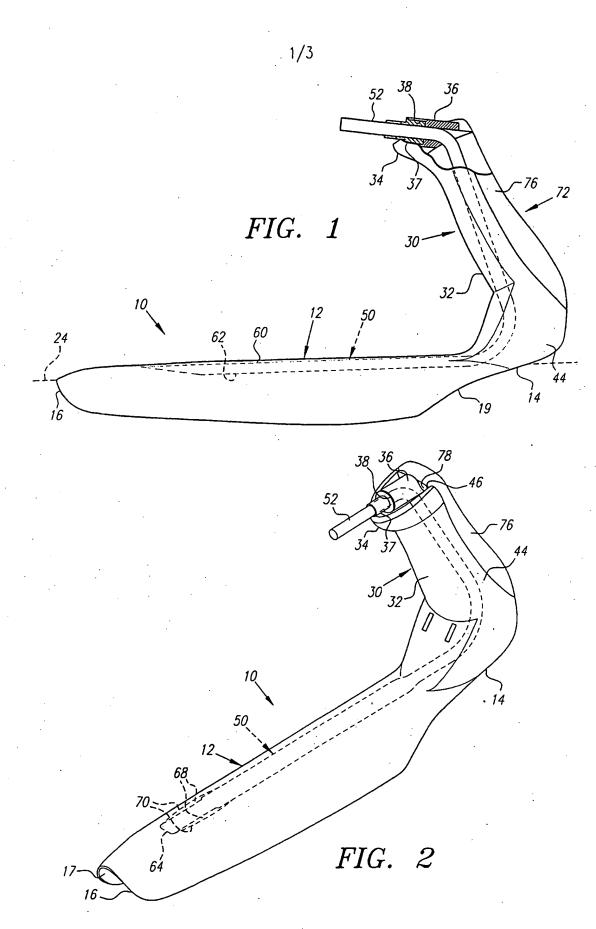



SUBSTITUTE SHEET (RULE 26)

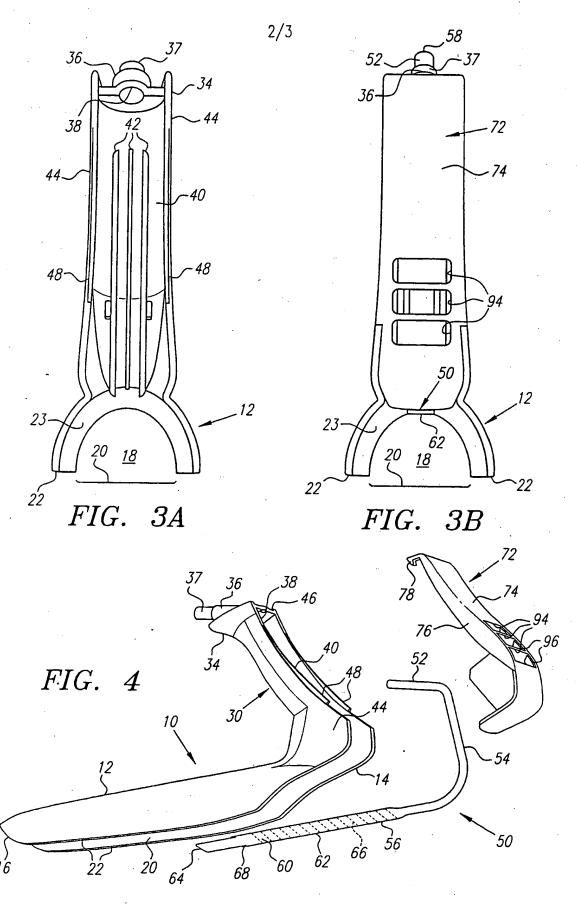

SUBSTITUTE SHEET (RULE 26)

3/3

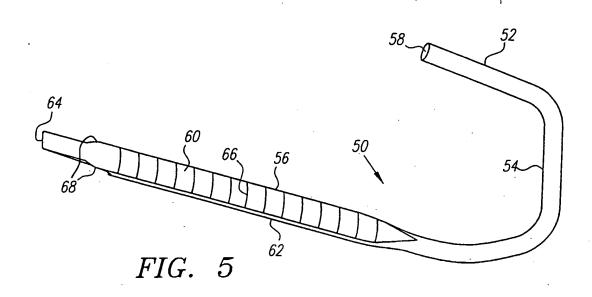

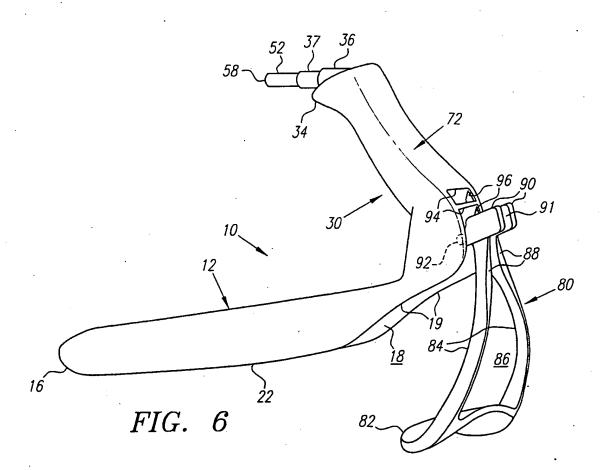

# INTERNATIONAL SEARCH REPORT

International application No. PCT/US99/19736

A. CLASSIFICATION OF SUBJECT MATTER  IPC(6) :A61B 17/00  US CL :600/184					
According to International Patent Classification (IPC) or to both	national classification and IPC				
B. FIELDS SEARCHED		<del></del>			
Minimum documentation searched (classification system follow-	ed by classification symbols)				
U.S. : 600/184, 190, 191, 197, 199, 201, 205, 210, 212, 22					
Documentation searched other than minimum documentation to the	ne extent that much down and a similar to	in the Colds			
	to extent that such documents are included	in the fields searched			
Electronic data base consulted during the international search (r	name of data base and where practicable	general terms used)			
APS Search Terms; harvest?, saphenous vein, retact?, arcuate, light		search terms used)			
C. DOCUMENTS CONSIDERED TO BE RELEVANT					
Category* Citation of document, with indication, where a	ppropriate, of the relevant passages	Relevant to claim No.			
X SAPHLITE, Saphenous Vein Instrumentation, Genzyme Surg CardioVascular Group, April 1998, p	1-3, 10, 11, 18, 34-40				
outers vasseriar Group, April 1996, p	ages 1-4. See page 2.	5-8			
X GB 2 078 526 A (KOCKOTT) 13 Jan	GB 2 078 526 A (KOCKOTT) 13 January 1982, Fig. 3.				
Y	4	18			
·		5-8			
X GB 2 133 694 A (WENDT et al.) 01	August 1984, Fig. 1.	19, 26, 27, 30-33			
Further documents are listed in the continuation of Box	C. See patent family annex.				
<ul> <li>Special categories of cited documents:</li> <li>A* document defining the general state of the art which is not considered</li> </ul>	"T" later document published after the integrated date and not in conflict with the appl	ication but cited to understand			
to be of particular relevance	the principle or theory underlying the				
"E" earlier document published on or after the international filing date  "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other	considered novel or cannot be conside when the document is taken alone	e claimed invention cannot be red to involve an inventive step			
*O* document referring to an oral disclosure, use, exhibition or other means	"Y" document of particular relevance; the considered to involve an inventive combined with one or more other such being obvious to a person skilled in the constant of the con	step when the document is a documents, such combination			
*P* document published prior to the international filing date but later than the priority date claimed	*&* document member of the same patent family				
Date of the actual completion of the international search	Date of mailing of the international sea	rch report			
27 OCTOBER 1999	17 NOV 1999				
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT  Authorized officer					
Washington, D.C. 20231	JEFFREY A. SMITH				
Facsimile No. (703) 305-3230	Telephone No. (703) 308-3588	•			